




FRONT VIEW

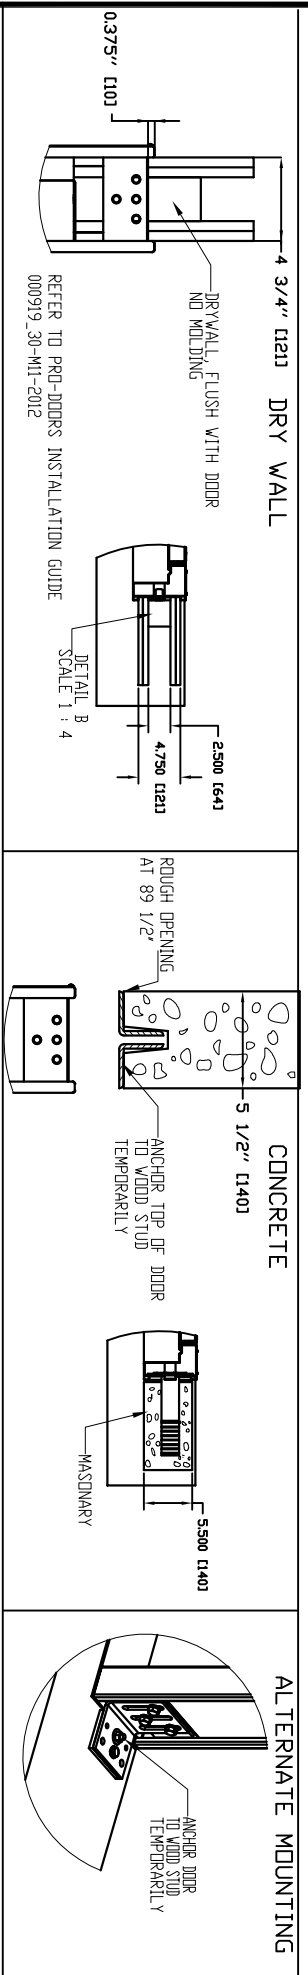

DETAIL B
SCALE 1 : 4

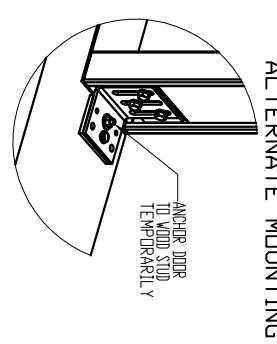

ALTERNATE MOUNTING
ANCHOR DOOR TO WOOD STUD TEMPORARILY IN MASONRY

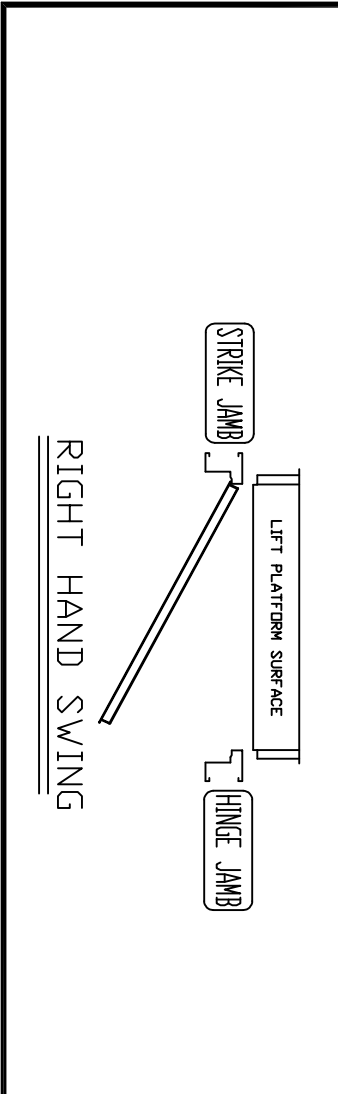


PRODDOOR 42"
AUTOMATIC RH

- NOTES:
- A) DRYWALL OR PARGING (BY OTHERS)AS REQ'D.
 - B) SEE DATASHEET OF THE INSTALLATION DRAWING FOR LANDING ENTRANCE SCHEDULE AND RUNNING CLEARANCE.
 - C) ALL INFORMATION IS SUBJECT TO CHANGE.

GENERAL INFORMATION:

- EACH LANDING ENTRANCE SHALL BE SUPPLIED AS A FINISHED ASSEMBLY WITH DOOR AND FRAME BLANKED, REINFORCED, DRILLED AND TAPPED FOR ALL COMPONENTS DETAILED, READY FOR INSTALLATION.
- FRAMES SHALL BE 16 GA, FULLY WELDED CONSTRUCTION WITH ALL WELDED JOINTS GROUNDED TO A SMOOTH, UNIFORM FINISH.
- DOORS SHALL BE 18 GA., 2" THICK, SWINGING, FLUSH, STEEL REINFORCED CONSTRUCTION COMPLETE WITH GLASS LITE(S) AS INDICATED.
- DOORS/FRAMES TO BE FABRICATED FROM ZINC PIPE COATED GALVANIZED STEEL WITH ZINC PRIMER, FACTORY APPLIED TOUCH-UP AT THOSE AREA WHERE COATING HAS BEEN REMOVED DUE TO WELDING/GRINDING.
- UL/ULC LABELLED ENTRANCES PROVIDED AS INDICATED 1 1/2 HOURS RATED.
- AUTO DOOR: OPERATOR IS PROVIDED & INSTALLED IN THE HEADER.

HORIZONTAL SECTION

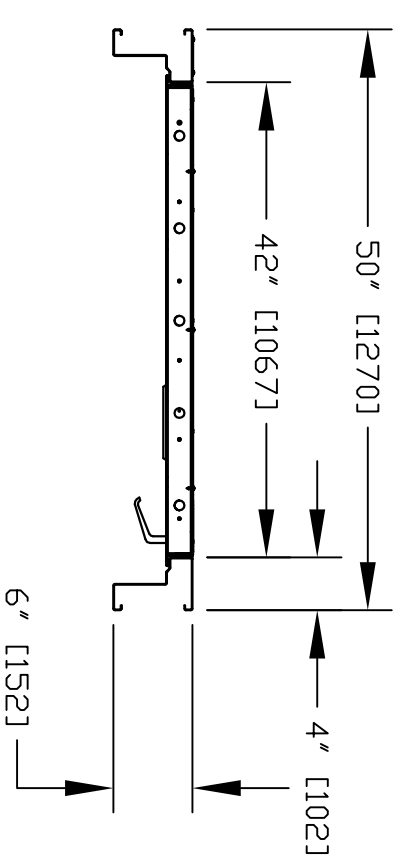

CUSTOMER: _____

PROJECT: _____

ADDRESS: _____

DATE: MM/DD/YY

REVISION DATE: MM/DD/YY

COMPLETED BY:

Part No. _____

Variant No. _____

savarria™

JOB No. JOB NUMBER 1 OF 1

SHEET No. 1 OF 1