



# Telecab

RESIDENTIAL ELEVATOR

## Planning Guide

**Applicable Codes:**

ASME A17.1/CSA-B44

Safety Code for Elevators and Escalators  
Section 5.3 – Private Residential Elevators

Part No. 000698  
21-m11-2017

---

Copyright © 2017  
Savaria Concord Lifts, Inc.  
All rights reserved

Printed in Canada

---

## Purpose of This Guide

This guide assists architects, contractors, and lift professionals to incorporate the Telecab Residential Elevator into a residential building design. The design and manufacture of the Telecab Residential Elevator meets the requirements of the following codes and standards:

- ASME A17.1 1996, Section 5.3
- ASME A17.1/CSA B44 2000, Section 5.3
- ASME A17.1/CSA B44 2004, Section 5.3
- ASME A17.1 2004, Addendum 2005, Section 5.3
- ASME A17.1/CSA B44 2007, Section 5.3
- ASME A17.1/CSA B44, Addendum 2008, Section 5.3
- ASME A17.1/CSA B44 2010, Section 5.3
- ASME A17.1/CSA B44 2013, Section 5.3
- ASME A17.1/CSA B44 2016, Section 5.3

We recommend that you contact your local authority having jurisdiction to ensure that you adhere to all local rules and regulations pertaining to residential elevators.

**IMPORTANT:** This Planning Guide provides nominal dimensions and specifications useful for the initial planning of a residential elevator project. Dimensions and specifications are subject to change without notice due to continually evolving code and product applications.

Before beginning actual construction, please consult Savaria Corporation or the authorized Savaria dealer in your area to ensure you receive your site-specific installation drawings with the dimensions and specifications for your project.



Visit our website for the most recent Telecab drawings and dimensions.

**NOTE:** These specifications are for the original Telecab only. For other sizes with increased load capacity, ask your Savaria dealer about the Telecab17 (845-lb capacity) described in the Telecab17 Planning Guide, P/N 001079.

## How to Use This Guide

- 1 Determine your client's intended use of the lift.
- 2 Determine the local code requirements.
- 3 Determine the site installation parameters.
- 4 Determine the cab type and hoistway size requirements.
- 5 Plan for electrical requirements.

## History

December 11, 2009 – Initial release  
April 6, 2010 – Updated logo and typeface  
October 14, 2010 – Updated all cab type information and drawings  
March 31, 2011 – Corrected travel speed in specifications table on page 4  
July 8, 2013 – Added Noise Level to specifications table on page 4  
January 2, 2014 – Revised text in drawing on page 5  
February 6, 2014 – Removed outdated Architect Specification section (was pages 17-19)  
March 12, 2014 – Revised Specifications table on page 4  
April 21, 2014 – Revised Specifications table on page 4  
November 5, 2014 – Revised Applicable Codes on page 3  
September 24, 2015 – Added Daily Cycle to specifications table on page 4  
March 8, 2016 – Savaria Corporation back to Savaria Concord Lifts, Inc.  
October 10, 2016 – Revised loads in Figure 1 on page 5  
November 22, 2016 – Revised Specifications table on page 4  
March 13, 2017 – Added Note at bottom of Specifications table on page 4  
March 15, 2017 – Added Note on this page, at top of page 4, and on page 8 referencing the Telecab17 product  
November 21, 2017 – Revised codes above

## Specifications



**NOTE:** These specifications are for the original Telecab only. For other sizes with increased load capacity, ask your Savaria dealer about the Telecab17 (845-lb capacity) described in the Telecab17 Planning Guide, P/N 001079.

### Telecab Specifications


Specification	Specification Data
Load capacity	500 lbs. (227 kg)
Maximum travel	23 ft (7.0 m)
Travel speed	20 ft/min (0.1 m/s)
Noise level (for typical installation)	72.9 dBA (up direction); 50.0 dBA (down direction) Measured at a height of 1m, distance of 1m, in front of the motor with all panels on
Daily cycle	Normal: 30; Heavy: 75; Excessive: 100 Maximum starts in 1 hour on standard installation: 12 NOTE: Please consult your Sales Representative if there a chance you may exceed these amounts.
Tower	Modular 8 ft (2.4 m) guide rail assembly with roller guide shoes
Control system	115 VAC relay logic operation 115 VAC up direction and 12 VDC down direction
Levels serviced	2 levels
Platform	Non-skid platform
Power supply (circuit supplied by others)	110 VAC, 20 A, 60 Hz, single phase
Lighting supply (circuit supplied by others)	120 volt, 60 Hz, single phase
Motor/pump	24 VDC, 3 Hp (2.1 kW) Gear type hydraulic pump
Electrical	Automatic battery recharging system (115 VAC) Low voltage controls
Drive system	2:1 roller chain hydraulic
Temperature operating range	-10 °C to +40 °C (14 °F to 104 °F)
Cab access	Standard: Front access only Optional: Left or right access; with optional 2-door access
Cab dimensions	Standard: W30" x L46" x H78" (762 mm x 1168 mm x 1981 mm) Optional: W32" x L53" x H78" (813 mm x 1346 mm x 1981 mm) Optional: W30" x L47" x H78" (762 mm x 1194 mm x 1981 mm) Optional: W32" x L54" x H78" (813 mm x 1372 mm x 1981 mm) Optional: W36" x L59" x H78" ( 914 mm x 1499 mm x 1981 mm)
Door size	H78" x W30" steel with Plexiglas insert
Minimum overhead clearance	92" (2337 mm)
Hall calls	Continuous pressure directional push buttons Keyed call/send
Color and finish	White electrostatic powder coat Clear or bronze acrylic windows
Safety features	Adjustable top floor presence detector built into the cab Electromechanical door lock and open door sensor Underpan safety sensor Emergency stop and alarm Emergency battery lowering Manual emergency lowering Fully-enclosed drive tower Pressure relief valve to prevent platform overload Slack chain safety device Two halogen lights in cab Telephone in cab
Optional equipment	Battery operation in up and down directions Two door concept (left/right access) Custom cab size (without ABS vacuum formed plastic finish) Custom color Horizontal plastic panel on hinged side Wired remote control in cab Hydraulic door closer Automatic door operator (without ABS vacuum formed plastic finish) Keyed call station Flush-mount or surface-mount call/send station Optional 24-volt battery model

### Site Construction Details

The Telecab needs a wall that supports a minimum of 700 lb (3114 N) of pull-out force at any bracket. The floor must be capable of supporting a load of 3200 lb (14.2 kN). See Figure 1.

A support wall with a combination of either two columns of three 2x4's, two columns of two 2x4's and two 2x6's, or a concrete or brick wall is required. Figure 2 shows the support wall configuration

**Figure 1: Wall/floor loading**

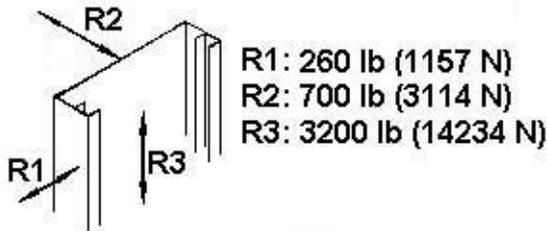

**Figure 2: Support wall configuration**



Load bearing wall must be able to support a pull-out force of 700 lb (3114 N) at any point.

Tower

Power supply, dedicated circuit 110 VAC, 20 Amps, single-phase and phone line must be provided.

Disconnect

Call/send station

The full surface under the elevator needs to support a load of 3200 lb (14234 N).

Floor cutout needs to support the loads shown in the Installation Drawings.

Top landing

Cab


Bottom landing

## Elevation View

The following illustration shows the general elevation view and dimensions of the Telecab. Note that the minimum overhead is 90" for a 78" inside height cab dimension.

Refer to your site-specific Installation Drawings for details relevant to your job site.

**Figure 3: Elevation view and dimensions**

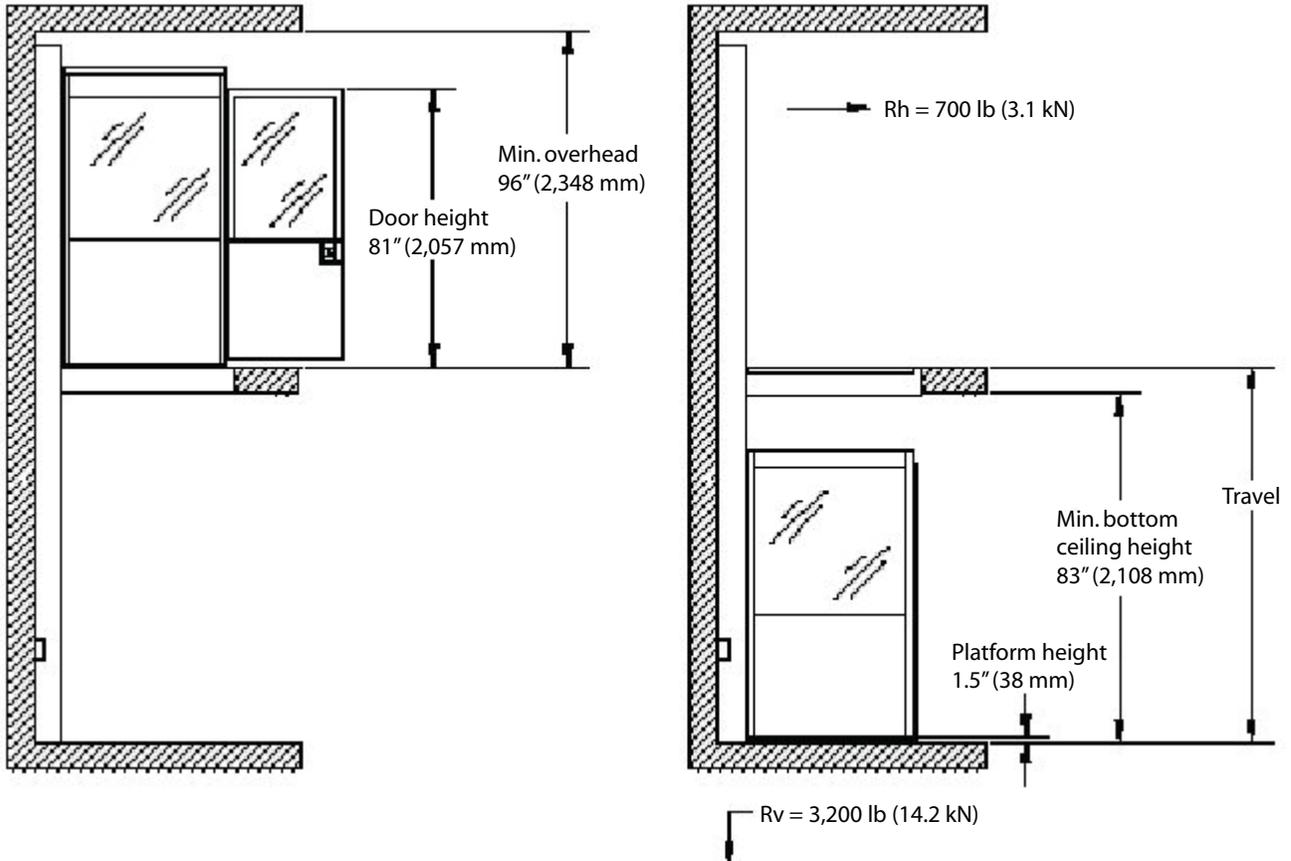


## Cab Types

Cab types and sizes are listed below. Always refer to your site-specific Installation Drawings for details.

- Type 5 – 30" x 46", front access only (standard)
- Type 5 – 32" x 53", front access only (optional)
- Type 1L– 30" x 47" or 32" x 54", left access (optional)
- Type 1R– 30" x 47" or 32" x 54", right access (optional)
- Type 2– 30" x 47" or 32" x 54", left or right access (optional)

**Figure 4: Cab types**

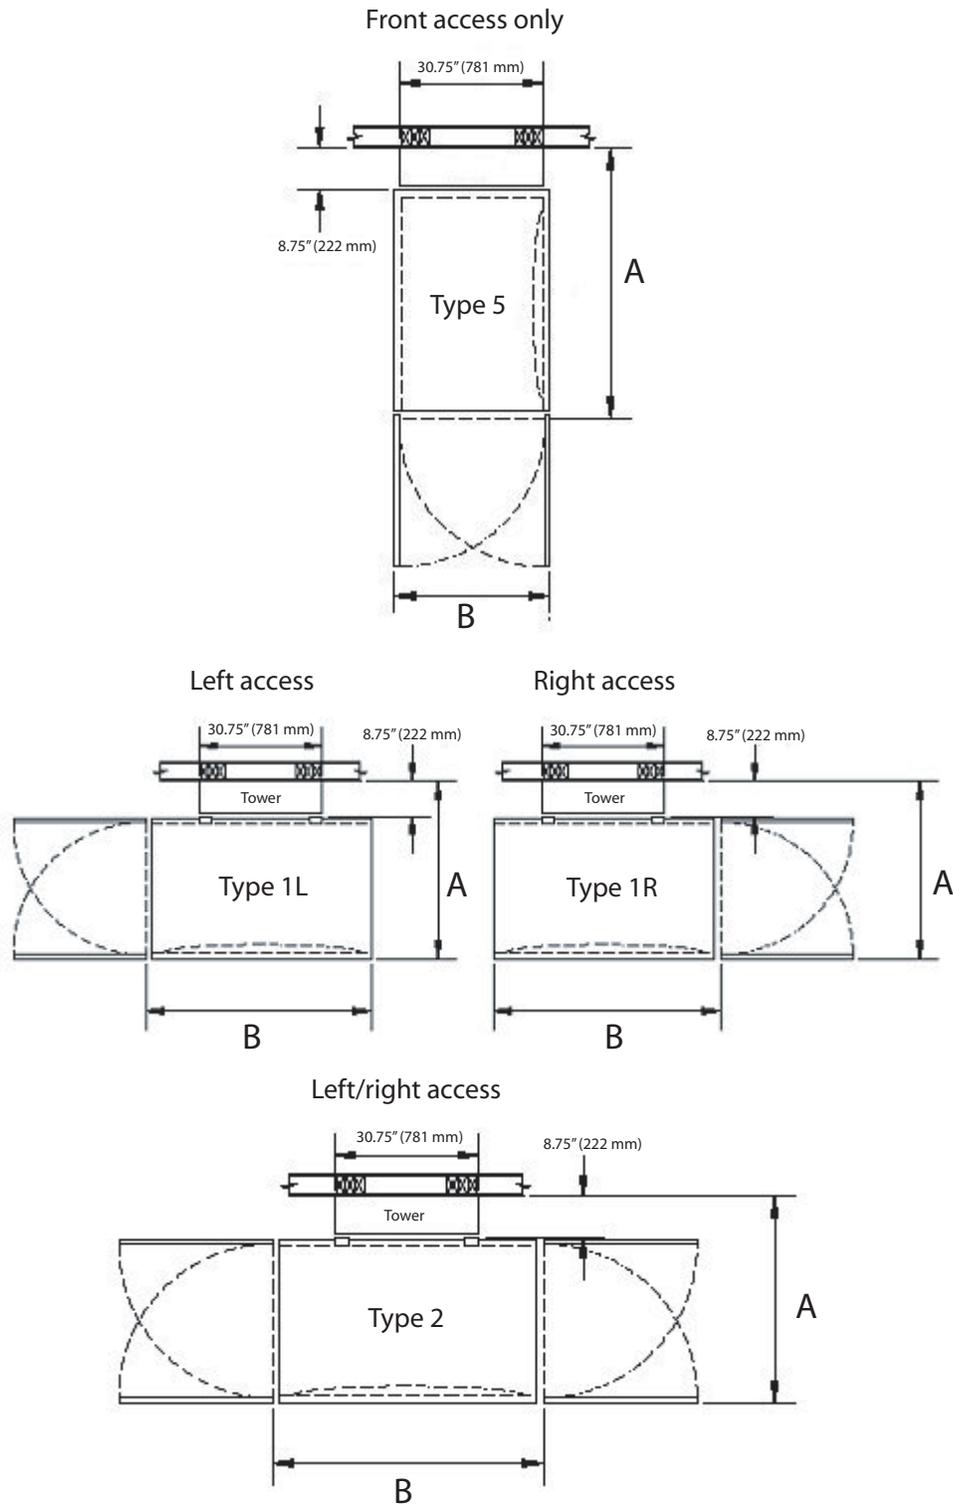

## Drawings

The next several pages provide installation drawings for the Telecab.

- Type 5– 30" x 46", front access only
- Type 5 – 32" x 53", front access only
- Type 1L – 30" x 47", left access
- Type 1L – 32" x 54", left access
- Type 1R – 30" x 47", right access
- Type 1R – 32" x 54", right access
- Type 2 – 30" x 47", left/right access
- Type 2 – 32" x 54", left/right access



**NOTE:** These specifications are for the original Telecab only. For other sizes with increased load capacity, ask your Savaria dealer about the Telecab17 (845-lb capacity) described in the Telecab17 Planning Guide, P/N 001079.



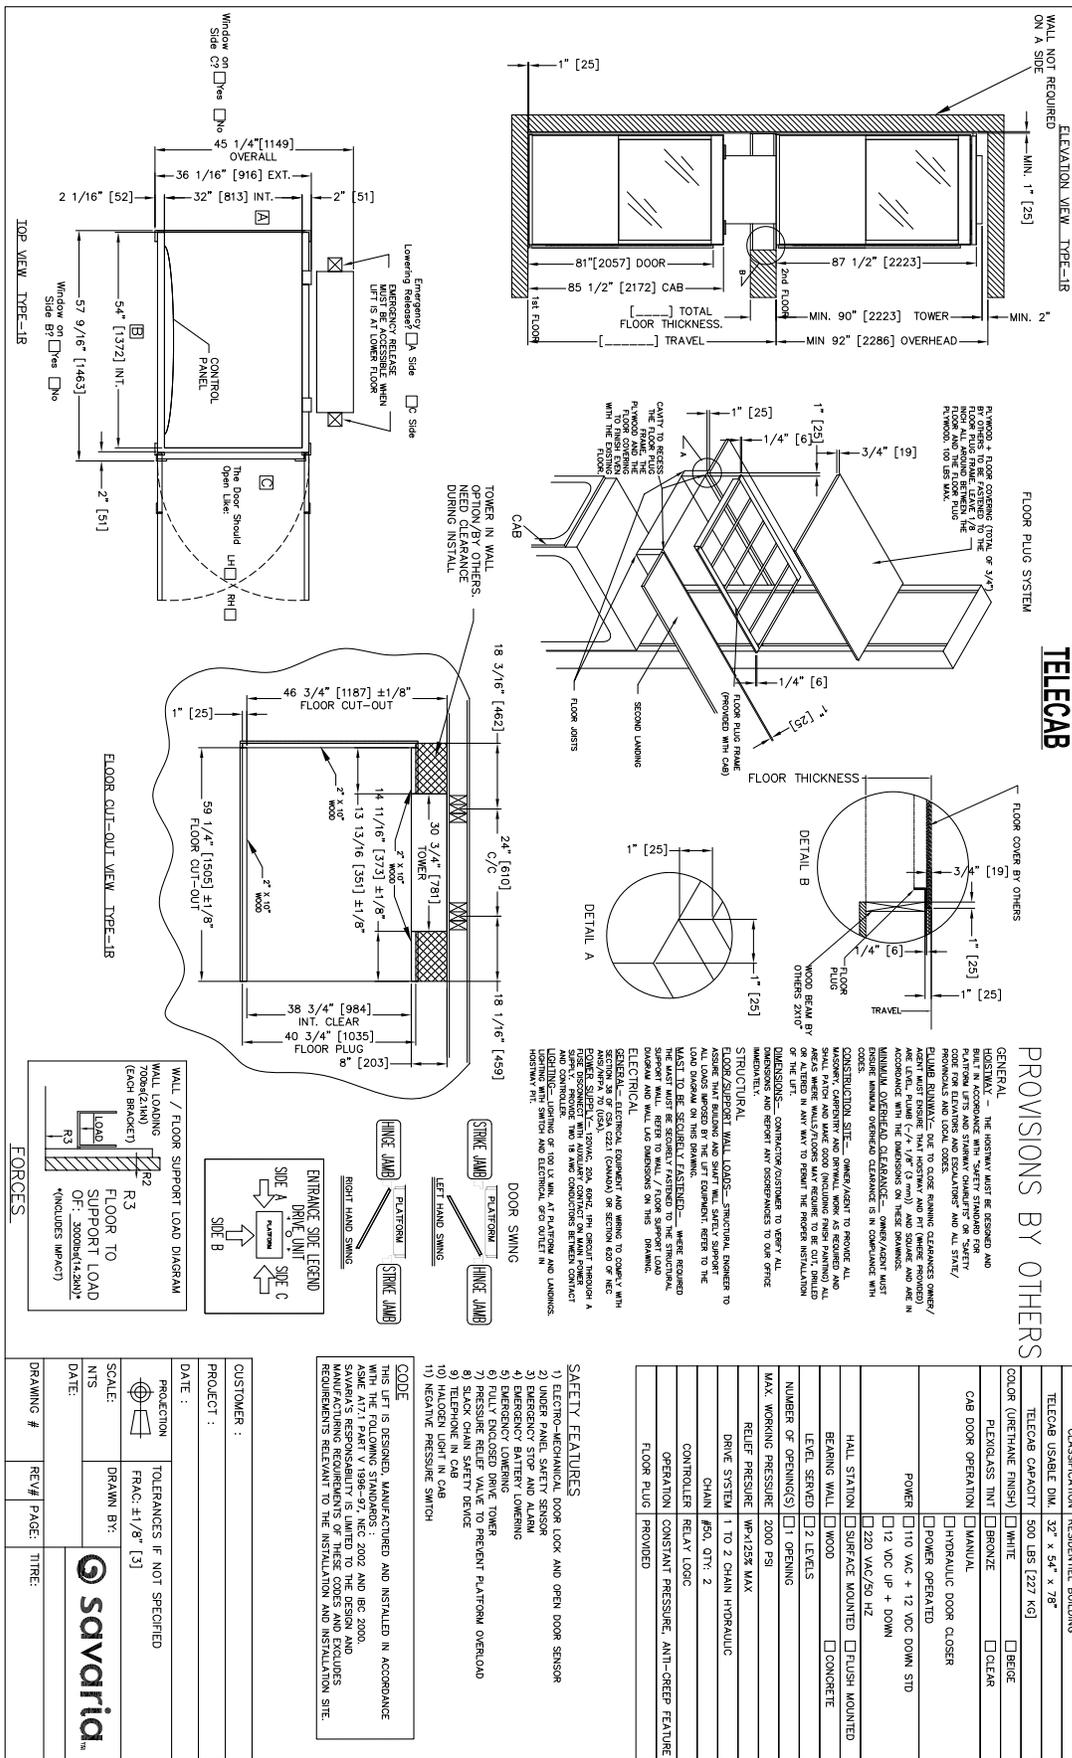








Figure 10: Type 1R – 32" x 54", right access









# **Telecab Residential Elevator PLANNING GUIDE**

Part No. 000698  
Copyright © 2017

Savaria Concord Lifts, Inc.  
[www.savaria.com](http://www.savaria.com)

Sales  
2 Walker Drive  
Brampton, Ontario, L6T 5E1, Canada  
Tel: (905) 791-5555  
Fax: (905) 791-2222  
Toll Free: 1-800-661-5112

